



# DTH Bits

Drilling Tools

Product Catalogue

DRILLCO® 

# About Us

DRILLCO® is at the forefront of innovation in the drilling industry, developing cutting-edge products and services that boost productivity, reduce downtime, and lower environmental impact.

With significant investments in R&D and partnerships with top universities, DRILLCO® leverages advanced simulation software to create bespoke consumables, equipment, and drilling services designed for optimal performance.

As a Chilean multinational, DRILLCO® specializes in providing state-of-the-art technological solutions for soil drilling in various sectors, including mining, geothermal, quarrying, water wells, and civil engineering projects.

Our modern 5,000 m<sup>2</sup> production facility in Quilicura boasts an impressive annual output capacity of 24,000 products, ensuring we meet the growing demands of our global clientele.

Exporting 85% of our products to 35 countries across the Americas, Africa, Europe, and Oceania, Drillco has achieved an average annual growth rate of 20% over the past three years, underscoring our commitment to excellence and innovation.

## ¿Why DRILLCO®?

Today, with over 50 years of expertise in hard rock drilling, DRILLCO® stands as the leader in mining drilling, boasting a presence in more than 30 countries through its 10 international branches. The PUMA BY DRILLCO® brand is a hallmark of quality and innovation, with PUMA® products in use from the Arctic Circle to Patagonia and from Siberia to the Sahara Desert.

At DRILLCO®, our mission is to deliver the lowest cost per meter in the market by tailoring our products to meet the unique requirements of each client.

This commitment to customization enables us to provide products specifically designed for every rock condition, ensuring a seamless user experience and helping our clients achieve their operational and economic objectives with ease.



# Information / Code Signature

## Insert Design



DRILLCO®'s tungsten carbide inserts are meticulously engineered to deliver outstanding durability and resilience under the most challenging conditions. By using premium materials and cutting-edge manufacturing techniques, our inserts ensure superior performance and a longer service life, effectively minimizing operating costs and reducing downtime. At DRILLCO®, we are dedicated to offering bespoke solutions that meet the unique requirements of each client, guaranteeing that our products enhance efficiency and productivity across all applications. This commitment to excellence underscores our position as a leader in the industry, providing reliable and high-performing products that meet the rigorous demands of modern drilling operations.

## Insert Types



### Dome Shape Tungsten Insert

DRILLCO®'s dome-shaped tungsten inserts are designed to provide exceptional durability and consistent penetration in hard rock formations. Their rounded shape optimizes impact distribution, reducing wear and extending the tool's lifespan. Ideal for applications in abrasive terrains, these inserts ensure efficient and precise drilling.



### Ballistic Tungsten Insert

DRILLCO®'s ballistic tungsten inserts stand out for their ability to maximize drilling speed in softer to medium rock formations. Their pointed design allows for rapid and efficient penetration, reducing drilling time and increasing productivity. Perfect for operations requiring high penetration rates, these inserts combine strength and superior performance.

# BULROC 2 shank (P2G) hammer



Features: Length shank #64,0mm / \_6 Splines

Diameter		Code	Description	No. x Button diameter, mm (inch)				Flushing holes	Weight Approx.	
Inch	mm			Outer gauge 35°	Inner Gauge 20°	Front 0°	Concavity 18°		kg	Lbs
3"	76.00	0204020000001	Flat Face	6x13 (1/2)		4x11 (7/16)		2	2,6	5,7
3"	76.00	0204020000002	Flat Face Ballistic	6x13 (1/2)		4x11 (7/16)		2	2,6	5,7
FOOT VALVE		It doesn't use foot valve								

# DHD-3.5 (P3.1) hammer



Features: Length shank = 181,0mm / \_8 Splines / Height of Foot Valve above strike face = 58,5mm

Diameter		Code	Description	No. x Button diameter, mm (inch)				Flushing holes	Weight Approx.	
Inch	mm			Outer gauge 35°	Inner Gauge 20°	Front 0°	Concavity 18°		kg	Lbs
3 11/32"	85.00	0204030000009	Dome	6x13 (1/2)	3x11 (7/16)	2x11 (7/16)		2	4,0	8,8
3 1/2"	90.00	0204030000002	Dome Ballistic	6x13 (1/2)	4x11 (7/16)	2x11 (7/16)		2	4,4	9,7
3 1/2"	90.00	0204030000003	Dome	6x13 (1/2)	4x11 (7/16)	2x11 (7/16)		2	4,4	9,7
3 1/2"	90.00	0204030000021	Dome A1	6x13 (1/2)	4x11 (7/16)	2x11 (7/16)		2	4,4	9,7
3 3/4"	95.00	0204030000012	Dome Double Gauge	6x13 (1/2)	2x13 (1/2)	3x13 (1/2)		2	4,7	10,4
3 3/4"	95.00	0204030000013	Dome Double Gauge Ballistic	6x13 (1/2)	2x13 (1/2)	3x13 (1/2)		2	4,7	10,4
4"	101.60	0204030000014	Dome Double Gauge	8x13 (1/2)	4x11 (7/16)	3x11 (7/16)		2	5,0	11,0
4"	101.60	0204030000015	Dome Double Gauge Ballistic	8x13 (1/2)	4x11 (7/16)	3x11 (7/16)		2	5,0	11,0
4 1/8"	105.00	0204030000025	Dome Ballistic Spherical	8x13 (1/2)	4x13 (1/2)	3x13 (1/2)		2	6,2	13,7
4 27/32"	123.00	0204030000022	Dome	8x14 (9/16)	4x14 (9/16)	2x13 (1/2)		2	8,0	17,6
3 3/8"	86.00	0204030000023	Flat Face	6x13 (1/2)		6x11 (7/16)		2	4,6	10,1
3 3/8"	92.00	0204030000024	Flat Face M1	8x13 (1/2)		6x11 (7/16)		2	4,9	10,8
3 5/8"	92.00	0204030000020	Concave	8x13 (1/2)		4x11 (7/16)	2x11 (7/16)	2	4,8	10,6
FOOT VALVE		0204030010000								

# DHD-340 shank (P4.4, PM4.1, PM4.3) hammer



**Features:** \_Length shank = 209mm / \_8 Splines / \_Height of Foot Valve above strike face = 45.0mm

Diameter		Code	Description	No. x Button diameter, mm (inch)				Flushing holes	Weight Approx.	
Inch	mm			Outer gauge 35°	Inner Gauge 20°	Front 0°	Concavity 18°		kg	Lbs
4 1/4"	108.00	0204040000001	Dome	8x13 (1/2)	4x13 (1/2)	3x13 (1/2)		2	8,2	18,1
4 1/2"	115.00	0204040000048	Dome Heavy	8x16 (5/8)	4x13 (1/2)	3x13 (1/2)		2	8,9	19,6
4 1/2"	115.00	0204040000039	Dome Ballistic	8x14 (9/16)	4x13 (1/2)	3x13 (1/2)		2	8,8	19,4
4 1/2"	115.00	0204040000040	Dome Ballistic Spherical	8x14 (9/16)	4x13 (1/2)	3x13 (1/2)		2	8,8	19,4
4 1/2"	115.00	0204040000024	Dome	8x14 (9/16)	4x13 (1/2)	3x13 (1/2)		2	8,8	19,4
4 9/16"	116.00	0204040000071	Dome Heavy	8x16 (5/8)	4x14 (9/16)	2x14 (9/16)		2	8,8	19,4
4 3/4"	121.00	0204040000054	Dome Heavy	8x16 (5/8)	4x14 (9/16)	3x13 (1/2)		2	8,9	19,6
5"	127.00	0204040000091	Dome Heavy Retractable	8x16 (5/8)	4x14 (9/16)	3x14 (9/16)		2	10,0	22,0
5"	127.00	0204040000057	Dome Heavy	8x16 (5/8)	4x14 (9/16)	3x14 (9/16)		2	9,8	21,6
5"	127.00	0204040000090	Dome Heavy*	8x16 (5/8)	4x14 (9/16)	3x14 (9/16)		2	9,8	21,6
5 3/4"	146.00	0204040000045	Dome Heavy	8x19 (3/4)	4x16 (5/8)	4x16 (5/8)		2	11,6	25,6
4 1/4"	108.00	0204040000102	Flat Face Heavy	8x14 (9/16)		6x13 (1/2)		2	8,0	17,6
4 5/16"	110.00	0204040000089	Flat Face Ballistic Spherical	8x13 (1/2)		7x13 (1/2)		2	8,2	18,1
4 3/8"	111.00	0204040000103	Flat Face Heavy	8x14 (9/16)		7x13 (1/2)		2	8,3	18,3
4 1/2"	115.00	0204040000109	Flat Face Heavy A3	8x16 (5/8)		6x13 (1/2)		2	9,0	19,8
4 1/2"	115.00	0204040000014	Flat Face	8x14 (9/16)		8x13 (1/2)		2	8,8	19,4
5"	127.00	0204040000087	Flat Face Heavy	8x16 (5/8)		7x14 (9/16)		2	9,7	21,4
4 1/8"	105.00	0204040000018	Concave	8x13 (1/2)		4x13 (1/2)	2x13 (1/2)	2	7,9	17,4
4 1/2"	115.00	0204040000007	Concave	8x14 (9/16)		4x13 (1/2)	2x13 (1/2)	2	8,8	19,4
4 3/4"	121.00	0204040000064	Concave Retractable	8x14 (9/16)		4x13 (1/2)	3x13 (1/2)	2	9,2	20,3
5"	127.00	0204040000044	Concave Heavy Ballistic	8x16 (5/8)		4x14 (9/16)	3x14 (9/16)	2	10,0	22,0
5"	127.00	0204040000043	Concave Heavy	8x16 (5/8)		4x14 (9/16)	3x14 (9/16)	2	10,0	22,0
5 1/2"	140.00	0204040000021	Concave	8x16 (5/8)		4x16 (5/8)	3x16 (5/8)	2	11,2	24,7
6"	152.00	0204040000026	Concave	8x16 (5/8)		4x16 (5/8)	4x16 (5/8)	2	12,1	24,7
FOOT VALVE		0204060010013								

(\*) : W = Variety of steel

(\*\*) : B/S = Ballistic Spherical (Spherical buttons on Outer Gauge and ballistic button on the other positions)

# TD40 shank (PM4.3) hammer



**Features:** \_Shank length = 209mm / \_12 Splines / \_Height of Foot Valve above strike face = 57.0mm

Diameter		Code	Description	No. x Button diameter, mm (inch)				Flushing holes	Weight Approx.	
Inch	mm			Outer gauge 35°	Inner Gauge 20°	Front 0°	Concavity 18°		kg	Lbs
4 <sup>23</sup> / <sub>64</sub>	110.00	0204040000144	Dome A1 Ballistic	8x13 (5/8)	4x13 (1/2)	3x13 (1/2)		2	8,7	19,2
4 1/2	115.00	0204040000096	Dome Heavy	8x16 (5/8)	4x13 (1/2)	3x13 (1/2)		2	9,3	20,5
4 1/2	115.00	0204040000148	Dome B/S*	8x14 (9/16)	4x13 (1/2)	3x13 (1/2)		2	9,3	20,5
5	127.00	0204040000094	Dome Heavy	8x16 (5/8)	4x14 (9/16)	3x14 (9/16)		2	10,1	22,3
5	127.00	0204040000149	Dome Heavy B/S*	8x16 (5/8)	4x14 (9/16)	3x14 (9/16)		2	10,1	22,3
5	127.00	0204040000172	Dome Heavy A2	8x19 (3/4)	4x14 (9/16)	3x14 (9/16)		2	10,2	22,5
5 1/2	140.00	0204040000127	Dome Heavy Retractable	8x19 (3/4)	4x16 (5/8)	3x16 (5/8)		2	11,8	26,0
4 1/2	115.00	0204040000101	Flat Face	8x14 (9/16)		8x13 (1/2)		2	9,3	20,5
4 1/2	115.00	0204040000106	Flat Face Heavy A3	8x16 (5/8)		6x13 (1/2)		2	9,4	20,7
4 1/2	115.00	0204040000105	Flat Face Heavy A2 B/S*	8x16 (5/8)		6x13 (1/2)		2	9,3	20,5
4 1/2	115.00	0204040000104	Flat Face Heavy A1 Ballistic	8x16 (5/8)		6x13 (1/2)		2	9,4	20,7
4 1/2	115.00	0204040000122	Flat Face A4	8x14 (9/16)		10x13 (1/2)		2	9,4	20,7
4 1/2	115.50	0204040000138	Flat Face Heavy Semiball. (CB)	8x16 (5/8)		6x13 (1/2)		2	9,6	21,2
4 1/2	115.50	0204040000139	Flat Face Heavy (FB)	8x16 (5/8)		6x13 (1/2)		2	9,6	21,2
4 1/2	115.50	0204040000140	Flat Face Heavy A6 (GT)	9x16 (5/8)		7x13 (1/2)		3	9,6	21,2
4 1/2	115.50	0204040000141	Flat Face Heavy (CB)	8x16 (5/8)		6x13 (1/2)		2	9,6	21,2
4 <sup>9</sup> / <sub>16</sub>	115.80	0204040000173	Flat Face Heavy (FB)	8x16 (5/8)		6x13 (1/2)		2	9,5	21,0
4 <sup>23</sup> / <sub>32</sub>	120.00	0204040000145	Flat Face Heavy	8x16 (5/8)		7x13 (1/2)		2	9,6	21,2
4 <sup>13</sup> / <sub>16</sub>	122.00	0204040000113	Flat Face Heavy B/S*	8x16 (5/8)		8x13 (1/2)		2	9,7	21,4
4 <sup>13</sup> / <sub>16</sub>	122.00	0204040000114	Flat Face Heavy	8x16 (5/8)		8x13 (1/2)		2	9,7	21,4
5	127.00	0204040000112	Flat Face Heavy Ballistic	8x16 (5/8)		8x13 (1/2)		2	10,1	22,3
5	127.00	0204040000120	Flat Face Heavy A1	8x16 (5/8)		7x14 (9/16)		2	10,1	22,3
5 <sup>1</sup> / <sub>8</sub>	130.00	0204040000107	Flat Face	8x16 (5/8)		8x14 (9/16)		2	10,3	22,7
5	127.00	0204040000121	Concave Heavy	8x16 (5/8)		4x14 (9/16)	3x14 (9/16)	2	10,0	22,0
4 1/2	115.00	020404000100	Drop Center	8x14 (9/16)		4x13 (1/2)	3x13 (1/2)	2	9,2	20,3
FOOT VALVE		0204040010017								

(\*) : B/S = Ballistic Spherical (Spherical buttons on Outer Gauge and ballistic button on the other positions)

# DHD-350 shank (PM5.2) hammer



Features: \_Length shank = 260mm / \_8 Splines / \_Height of Foot Valve above strike face = 63.0mm

Diameter		Code	Description	No. x Button diameter, mm (inch)				Flushing holes	Weight Approx.	
Inch	mm			Outer gauge 35°	Inner Gauge 20°	Front 0°	Concavity 18°		kg	Lbs
5 1/2"	140.00	0204050000032	Dome B/S*	8x16 (5/8)	4x16 (5/8)	3x16 (5/8)		2	16,0	35,3
5 1/2"	140.00	0204050000046	Dome Heavy	8x19 (3/4)	4x16 (5/8)	3x16 (5/8)		2	16,4	36,2
5 1/2"	140.00	0204050000063	Dome Welding	8x16 (5/8)	4x16 (5/8)	3x16 (5/8)		2	16,0	35,3
5 3/4"	146.00	0204050000066	Dome Heavy	8x19 (3/4)	4x16 (5/8)	4x16 (5/8)		2	16,6	36,6
5 1/2"	140.00	0204050000039	Flat Face "Quarry"	8x16 (5/8)		8x16 (5/8)		2	16,7	36,8
5 3/4"	146.00	0204050000013	Flat Face "Quarry"	8x16 (5/8)		8x16 (5/8)		2	17,6	38,8
5 1/8"	130.00	0204050000023	Concave	8x16 (5/8)		4x16 (5/8)	3x14 (9/16)	2	15,4	34,0
5 1/2"	140.00	0204050000001	Concave	8x16 (5/8)		4x16 (5/8)	3x16 (5/8)	2	16,6	36,6
5 3/4"	146.00	0204050000011	Concave "Quarry"	8x16 (5/8)		4x16 (5/8)	4x16 (5/8)	2	16,5	36,4
5 7/8"	149.00	0204050000022	Concave	8x16 (5/8)		4x16 (5/8)	3x16 (5/8)	2	16,9	37,3
FOOT VALVE		0204050010000								

(\*) : B/S = Ballistic Spherical (Spherical buttons on Outer Gauge and ballistic button on the other positions)

# P5SH shank (P5SH) hammer



Features: \_Length shank = 194,5mm / \_12 Splines / \_Height of Foot Valve above strike face = 48,0mm

Diameter		Code	Description	No. x Button diameter, mm (inch)				Flushing holes	Weight Approx.	
Inch	mm			Outer gauge 35°	Inner Gauge 20°	Front 0°	Concavity 18°		kg	Lbs
5 3/4"	146.00	♦ 0223050000012	Dome Concave 10W*	10x16 (5/8)	6x16 (5/8)	2x16 (5/8)	2x16 (5/8)	2	15,0	33,1
5 1/2"	140.00	♦ 0223050000004	Flat Face "Quarry"	8x16 (5/8)		8x16 (5/8)		2	14,6	32,2
5 3/4"	146.00	♦ 0223050000001	Flat Face Heavy	8x19 (3/4)		7x16 (5/8)		2	15,3	33,7
5 3/4"	146.00	♦ 0223050000003	Flat face "Quarry"	8x16 (5/8)		8x16 (5/8)		2	15,0	33,0
6"	152.00	♦ 0223050000002	Flat Face Heavy	8x19 (3/4)		8x16 (5/8)		2	15,8	34,8
5 5/16"	135.00	• 0223050000011	Concave A1 3 Holes B/S**	9x14 (9/16)		6x14 (9/16)	5x14 (9/16)	3	14,0	30,8
5 3/4"	146.00	♦ 0223050000006	Concave	8x16 (5/8)		4x16 (5/8)	4x16 (5/8)	2	14,8	32,6
6"	152.00	♦ 0223050000010	Concave Heavy	8x19 (3/4)		4x16 (5/8)	4x16 (5/8)	2	15,6	34,4
6"	152.00	• 0223050002007	Concave 3 Holes	9x16 (5/8)		6x16 (5/8)	4x16 (5/8)	3	15,5	34,2
FOOT VALVE		♦ 0223050010002								
		• 0223050010003								

(\*) : W = Wings

(\*\*) : B/S = Ballistic Spherical (Spherical buttons on Outer Gauge and ballistic button on the other positions)

♦ : Bits use foot valve 0223050010002

• : Bits use foot valve 0223050010003

# QL-5 shank (PM5.2, PM5.2EX, PM55) hammer



**Features:** \_Length shank = 241mm / \_12 Splines / \_Height of Foot Valve above strike face = 53.0mm

Diameter		Code	Description	No. x Button diameter, mm (inch)				Flushing holes	Weight Approx.	
Inch	mm			Outer gauge 35°	Inner Gauge 20°	Front 0°	Concavity 18°		kg	Lbs
5 1/2"	140.00	0204050000030	Dome	8x19 (3/4)	4x16 (5/8)	3x16 (5/8)		2	16,4	36,2
5 1/2"	140.00	0204050000042	Dome Heavy Ballistic	8x19 (3/4)	4x16 (5/8)	3x16 (5/8)		2	16,4	36,2
5 1/2"	140.00	0204050000053	Dome Welding	8x16 (5/8)	4x16 (5/8)	3x16 (5/8)		2	16,3	36,0
5 1/2"	140.00	0204050000091	Dome Heavy 3 Holes Retractable	9x19 (3/4)	6x16 (5/8)	4x16 (5/8)		3	16,3	36,0
5 3/4"	146.00	0204050000083	Dome 3 Holes Retractable Wear Pad	9x16 (5/8)	3x16 (5/8)	6x16 (5/8)		3	17,4	38,4
5 3/4"	146.00	0204050000081	Dome 3 Holes Welding	9x16 (5/8)	3x16 (5/8)	6x16 (5/8)		3	17,2	38,0
5 3/4"	146.00	0204050000088	Dome Concave 10W*	10x16 (5/8)	6x16 (5/8)	2x16 (5/8)	2x16 (5/8)	2	17,0	37,2
5 3/4"	146.00	0204050000062	Dome Heavy	8x19 (3/4)	4x16 (5/8)	4x16 (5/8)		2	16,5	36,4
5 3/4"	146.00	0204050000076	Dome Heavy Retractable	8x19 (3/4)	4x16 (5/8)	4x16 (5/8)		2	16,7	36,8
5 3/4"	146.00	0204050000020	Dome Heavy Welding	8x19 (3/4)	4x16 (5/8)	4x16 (5/8)		2	16,2	35,7
5 3/4"	146.00	0204050000094	Dome Heavy A1	8x19 (3/4)	4x19 (3/4)	4x16 (5/8)		2	17,0	37,5
5 3/4"	146.00	0204050000099	Dome Heavy A2	8x19 (3/4)	4x19 (3/4)	4x16 (5/8)		2	17,0	37,5
6 1/8"	155.50	0204050000077	Dome Heavy HQ**	9x19 (3/4)	3x19 (3/4)	6x16 (5/8)		3	18,7	41,2
6 1/8"	155.50	0204050000078	Dome Heavy A1	9x19 (3/4)	3x19 (3/4)	6x16 (5/8)		3	19,1	42,1
5 19/32"	142.00	0204050000048	Flat Face	8x16 (5/8)		8x16 (5/8)		2	16,1	35,5
5 3/4"	146.00	0204050000014	Flat Face "Quarry"	8x16 (5/8)		8x16 (5/8)		2	16,2	35,7
5 3/4"	146.00	0204050000061	Flat Face Heavy	8x19 (3/4)		7x16 (5/8)		2	17,0	37,5
5 5/16"	135.00	0204050002086	Concave 3 Holes B/S***	9x16 (5/8)		6x14 (9/16)	5x14 (9/16)	3	15,6	34,4
5 5/16"	135.00	0204050002087	Concave A1 3 Holes B/S***	9x14 (9/16)		6x14 (9/16)	5x14 (9/16)	3	15,5	34,2
5 1/2"	140.00	0204050000089	Concave *1	8x16 (5/8)		4x16 (5/8)	3x16 (5/8)	2	16,3	36,0
5 1/2"	140.00	0204050000003	Concave *2	8x16 (5/8)		4x16 (5/8)	3x16 (5/8)	2	16,3	36,0
5 3/4"	146.00	0204050000012	Concave "Quarry"	8x16 (5/8)		4x16 (5/8)	4x16 (5/8)	2	17,0	37,5
5 3/4"	146.00	0204050000071	Concave Heavy Retractable	8x19 (3/4)		4x16 (5/8)	3x16 (5/8)	2	17,0	37,5
6 1/8"	155.50	0204050000070	Concave Heavy	8x19 (3/4)		4x16 (5/8)	4x16 (5/8)	2	19,0	41,9
FOOT VALVE		0204050010011								

(\*) : W = Wings

(\*\*) : HQ = Hard Quartzite

(\*\*\*) : B/S = Ballistic Spherical (Spherical buttons on Outer Gauge and ballistic button on the other positions)

(\*1) : For Quarry - terrain hard and abrasive

(\*2) : For Mine - terrain soft



# DHD-360 shank (PM6.2) hammer



**Features:** \_Length shank = 307mm / \_8 Splines / \_Height of Foot Valve above strike face 56.0mm

Diameter		Code	Description	No. x Button diameter, mm (inch)				Flushing holes	Weight Approx.	
Inch	mm			Outer gauge 35°	Inner Gauge 20°	Front 0°	Concavity 18°		kg	Lbs
6 1/2"	165.00	0204060000088	Dome	8x16 (5/8)	4x16 (5/8)	6x16 (5/8)		2	25,4	56,0
6 3/4"	171.50	0204060000096	Dome Double Gauge Welding	10x16 (5/8)	8x16 (5/8)	7x16 (5/8)		2	26,3	58,0
6 3/4"	171.50	0204060000137	Dome Heavy A1 Retractable	9x19 (3/4)	3x19 (3/4)	6x16 (5/8)		3	26,0	57,3
6 3/4"	171.50	0204060000202	Dome Heavy A3	9x19 (3/4)	6x19 (3/4)	5x16 (5/8)		3	25,7	56,7
6"	152.50	0204060000021	Flat Face	8x16 (5/8)		8x16 (5/8)		2	24,0	53,0
6 1/8"	155.50	0204060000024	Flat Face	10x16 (5/8)		9x16 (5/8)		2	25,0	55,0
8"	203.00	0204060000022	Flat Face	12x16 (5/8)		16x16 (5/8)		2	34,0	75,0
6"	152.50	0204060000025	Concave	8x16 (5/8)		4x16 (5/8)	4x16 (5/8)	2	23,0	51,0
6 1/8"	155.50	0204060000011	Concave	10x16 (5/8)		4x16 (5/8)	4x16 (5/8)	2	24,0	53,0
6 1/2"	165.00	0204060000173	Concave Heavy	8x19 (3/4)		4x16 (5/8)	4x16 (5/8)	2	25,2	55,6
6 3/4"	171.50	0204060000158	Concave Heavy Retractable 10W*	10x19 (3/4)		6x16 (5/8)	4x16 (5/8)	2	26,6	58,6
7 1/2"	190.50	0204060000048	Concave	10x16 (5/8)		4x16 (5/8)	8x16 (5/8)	2	30,0	66,1
8"	203.00	0204060000047	Concave Welding	12x16 (5/8)		8x16 (5/8)	7x16 (5/8)	2	34,0	75,0
8 1/2"	216.00	0204060000046	Concave	12x16 (5/8)		10x16 (5/8)	8x16 (5/8)	2	37,0	81,6
8 5/8"	219.00	0204060000026	Concave	12x16 (5/8)		10x16 (5/8)	9x16 (5/8)	2	38,5	84,9
9 1/2"	241.00	0204060000110	Concave Dome	12x16 (5/8)	8x16 (5/8)	6x16 (5/8)	9x16 (5/8)	2	43,5	96,0
10"	254.00	0204060000105	Concave	18x19 (3/4)		3x19 (3/4)	9x19 (3/4)	3	44,0	97,0
FOOT VALVE		0204060010003								

(\*) : W = Wings.

# QL -6 shank ( PM6.2, PM6 2EX ) hammer



Features: \_Length shank = 254mm / \_12 Splines / \_Height of Foot Valve above strike face 59.0mm

Diameter		Code	Description	No. x Button diameter, mm (inch)				Flushing holes	Weight Approx.	
Inch	mm			Outer gauge 35°	Inner Gauge 20°	Front 0°	Concavity 18°		kg	Lbs
6 1/8"	155.50	0204060000068	Dome Ballistic	8x16 (5/8)	4x16 (5/8)	5x16 (5/8)		2	23,0	50,7
6 1/2"	165.00	0204060000077	Dome Heavy	8x19 (3/4)	4x16 (5/8)	5x16 (5/8)		2	24,0	53,0
6 1/2"	165.00	0204060000143	Dome Heavy Retractable	8x19 (3/4)	4x16 (5/8)	5x16 (5/8)		2	24,2	53,5
6 1/2"	165.00	0204060000147	Dome Heavy A1	9x19 (3/4)	6x16 (5/8)	5x16 (5/8)		3	25,0	55,0
6 1/2"	165.00	0204060000166	Dome Heavy A2	9x19 (3/4)	6x19 (3/4)	5x16 (5/8)		3	25,0	55,0
6 3/4"	171.50	0204060000095	Dome Heavy A1	9x19 (3/4)	3x19 (3/4)	6x16 (5/8)		3	25,5	56,0
6 3/4"	171.50	0204060000135	Dome Heavy A1 Retractable	9x19 (3/4)	3x19 (3/4)	6x16 (5/8)		3	26,0	57,3
6 3/4"	171.50	0204060000140	Dome Heavy A2	9x19 (3/4)	6x16 (5/8)	5x16 (5/8)		3	25,6	56,4
6 3/4"	171.50	0204060000184	Dome Heavy A2 Retractable	9x19 (3/4)	6x16 (5/8)	5x16 (5/8)		3	25,6	56,4
6 3/4"	171.50	0204060000136	Dome Heavy A2 Retractable Wear pad	9x19 (3/4)	6x16 (5/8)	5x16 (5/8)		3	25,6	56,4
6 3/4"	171.50	0204060000174	Dome Heavy A3	9x19 (3/4)	6x19 (3/4)	5x19 (3/4)		3	25,6	56,4
6 3/4"	171.50	0204060000086	Dome Heavy B/S**	9x19 (3/4)	3x19 (3/4)	5x19 (3/4)		3	26,0	57,3
6 3/4"	171.50	0204060000192	Dome Heavy A4	9x19 (3/4)	6x19 (3/4)	5x19 (3/4)		3	25,6	56,4
7 1/2"	190.50	0204060000186	Dome Heavy A1 Retr 10W*	10x19 (3/4)	6x19 (3/4)	5x19 (3/4)		2	30,0	66,0
7 1/2"	190.50	0204060000169	Dome Heavy Retr 10W*	10x19 (3/4)	6x19 (3/4)	6x19 (3/4)		2	30,0	66,0
7 1/2"	190.5	0204060000198	Dome Double Gauge Heavy Retractable	10x19 (3/4)	4x19 (3/4)	4x19 (3/4)		2	29,6	65,3
6 1/8"	156.00	0204060000029	Flat Face	8x16 (5/8)		8x16 (5/8)		2	24,0	53,0
6 1/2"	165.00	0204060000167	Flat Face Heavy	8x19 (3/4)		9x16 (5/8)		2	25,0	55,0
6 1/2"	165.00	0204060000176	Flat Face Heavy 10W*	10x19 (3/4)		8x19 (3/4)		2	25,0	55,0
6 1/2"	165.00	0204060000178	Flat Face Heavy	9x19 (3/4)		8x19 (3/4)		3	25,0	55,0
6 1/2"	165.00	0204060000058	Flat Face Welding	8x16 (5/8)		11x16 (5/8)		2	25,0	55,0
6 1/2"	165.00	0204060000189	Flat Face	10x18		10x18		2	24,7	54,5
6 1/2"	165.00	0204060000193	Flat Face QS	10x18		10x18		2	24,7	54,5
6 1/2"	165.00	0204060000204	Flat Face Ballistic	9x16 (5/8)		11x16 (5/8)		3	25,0	55,0
6 1/2"	165.00	0204060000205	Flat Face Heavy A1	9x19 (3/4)		11x16 (5/8)		3	25,0	55,0
6 1/2"	165.00	0204060000206	Flat Face Retractable Wear pad	8x16 (5/8)		11x16 (5/8)		2	24,7	54,5
6 3/4"	171.50	0204060000165	Flat Face Heavy 10W* B1	10x19 (3/4)		9x19 (3/4)		2	26,0	57,0
6 3/4"	171.50	0204060000156	Flat Face Heavy 10W*	10x19 (3/4)		9x19 (3/4)		2	26,0	57,0
6 3/4"	171.50	0204060000203	Flat Face Heavy Welding	9x19 (3/4)		9x19 (3/4)		3	25,4	56,0
7 1/2"	190.50	0204060000188	Flat Face Heavy 10W*	10x19 (3/4)		11x19 (3/4)		2	30,0	66,0
6"	152.40	0204060000207	Concave	8x16 (5/8)		4x16 (5/8)	4x16 (5/8)	2	23,0	50,7
6 1/2"	165.00	0204060000162	Concave Double Gauge	9x19 (3/4)	3x19 (3/4)	3x19 (3/4)	5x16 (5/8)	3	25,0	55,1
6 1/2"	165.00	0204060000075	Concave Heavy	8x19 (3/4)		4x16 (5/8)	4x16 (5/8)	2	24,6	54,2
6 1/2"	165.00	0204060000146	Concave Heavy "MINING"	10x19 (3/4)		6x16 (5/8)	4x16 (5/8)	2	25,0	55,1
6 1/2"	165.00	0204060000161	Concave Heavy "MINING" B1***	10x19 (3/4)		6x16 (5/8)	4x16 (5/8)	2	25,0	55,1
6 1/2"	165.00	0204060000195	Concave	8x16 (5/8)		4x16 (5/8)	4x16 (5/8)	2	24,4	53,8
FOOT VALVE		0204060010013								

(\*) : W = Wings.

(\*\*) : B/S = Ballistic Spherical (Spherical buttons on Outer Gauge and ballistic button on the other positions)

(\*\*\*) : = Special grade botton

# SD-6 shank (PM6.2) hammer



Features: Length shank = 324mm / 8 Splines / Height of Foot Valve above strike face 54.0mm

Diameter		Code	Description	No. x Button diameter, mm (inch)				Flushing holes	Weight Approx.	
Inch	mm			Outer gauge 35°	Inner Gauge 20°	Front 0°	Concavity 18°		kg	Lbs
6"	152.50	0204060000009	Flat Face	8x16 (5/8)		8x16 (5/8)		2	26,0	57,3
6"	152.50	0204060000117	Flat Face Welding	8x16 (5/8)		8x16 (5/8)		2	26,0	57,3
6 1/8"	155.50	0204060000033	Flat face	10x16 (5/8)		9x16 (5/8)		2	26,7	58,9
6 1/2"	165.00	0204060000036	Flat Face	8x16 (5/8)		11x16 (5/8)		2	28,0	61,7
8"	203.00	0204060000015	Flat Face	12x16 (5/8)		16x16 (5/8)		2	36,0	79,4
6"	152.00	0204060000008	Concave	8x16 (5/8)		4x16 (5/8)	4x16 (5/8)	2	25,7	56,7
6 1/8"	155.50	0204060000040	Concave	10x16 (5/8)		4x16 (5/8)	4x16 (5/8)	2	26,0	57,3
6 1/8"	155.50	0204060000152	Concave P1	8x16 (5/8)		4x16 (5/8)	4x16 (5/8)	2	26,0	57,3
6 3/4"	171.50	0204060000002	Concave	10x16 (5/8)		4x16 (5/8)	4x16 (5/8)	2	28,0	61,7
7 1/2"	190.50	0204060000038	Concave	10x16 (5/8)		4x16 (5/8)	8x16 (5/8)	2	32,0	70,5
8"	203.00	0204060000051	Concave	12x16 (5/8)		8x16 (5/8)	7x16 (5/8)	2	36,0	79,4
FOOT VALVE		0204060010002								



# PUMA-7.1 shank (P7.1) hammer



Features: \_Length shank = 336mm / \_12 Splines / \_Height Foot Valve above strike face = 57mm

Diameter		Code	Description	No. x Button diameter, mm (inch)				Flushing holes	Weight Approx.	
Inch	mm			Outer gauge 35°	Inner Gauge 20°	Front 0°	Concavity 18°		kg	Lbs
7 7/8"	200.00	0201070000015	Dome Double Gauge Heavy Retractable	12x19 (3/4)	9x19 (3/4)	7x16 (5/8)		3	45,3	100,0
7 7/8"	200.00	0201070000016	Dome Double Gauge Heavy Retractable D*	12x19 (3/4)	9x19 (3/4)	7x16 (5/8)		3	45,3	100,0
8 1/2"	216.00	0201070000026	Dome Double Gauge Heavy Retractable	12x19 (3/4)	12x19 (3/4)	6x19 (3/4)		3	48,0	105,8
7 7/8"	200.00	0201070000001	Concave Retractable	12x16 (5/8)	6x16 (5/8)	9x16 (5/8)		3	44,0	97,0
7 7/8"	200.00	0201070000004	Concave	12x16 (5/8)	6x16 (5/8)	9x16 (5/8)		3	44,0	97,0
7 7/8"	200.00	0201070000005	Concave Heavy	12x19 (3/4)	6x16 (5/8)	9x16 (5/8)		3	44,0	97,0
7 7/8"	200.00	0201070000006	Concave Double Gauge	12x16 (5/8)	6x16 (5/8)	10x16 (5/8)		3	44,0	97,0
7 7/8"	200.00	0201070000007	Concave Heavy Retractable	12x19 (3/4)	6x16 (5/8)	9x16 (5/8)		3	44,0	97,0
7 7/8"	200.00	0201070000008	Concave Heavy B/S** Retractable	12x19 (3/4)	6x16 (5/8)	9x16 (5/8)		3	44,0	97,0
7 7/8"	200.00	0201070000017	Concave Double Gauge Heavy Retractable 2 Holes	12x19 (3/4)	6x19 (3/4)	12x19 (3/4)		3	45,7	100,8
7 7/8"	200.00	0201070000022	Concave Heavy Retractable Wear pad	12x19 (3/4)	6x16 (5/8)	9x16 (5/8)		3	44,0	97,0
8 1/2"	200.00	0201070000009	Concave Ballistic Welding	12x16 (5/8)		10x16 (5/8)	8x16 (5/8)	3	48,0	105,8
8 1/2"	216.00	0201070000012	Concave Welding	12x16 (5/8)		10x16 (5/8)	8x16 (5/8)	3	48,0	105,8
8 1/2"	216.00	0201070000018	Concave Dome B/S** Wear pad	12x16 (5/8)	8x16 (5/8)	12x16 (5/8)		2	48,5	107,0
8 1/2"	216.00	0201070000019	Concave Dome B/S** Retractable	12x16 (5/8)	8x16 (5/8)	12x16 (5/8)		2	48,5	107,0
8 1/2"	216.00	0201070000021	Concave Dome 3 Holes B/S** Retractable	12x16 (5/8)	6x16 (5/8)	15x16 (5/8)		3	48,5	107,0
8 1/2"	216.00	0201070000023	Concave Dome A1 B/S** Retractable	12x19 (3/4)	6x19 (3/4)	9x19 (3/4)		3	48,0	105,8
8 1/2"	216.00	0201070000024	Concave Heavy Retractable	12x19 (3/4)	6x19 (3/4)	10x16 (5/8)		3	48,0	105,8
8 1/2"	216.00	0201070000025	Concave Dome 3 Holes Retractable	12x16 (5/8)	6x16 (5/8)	15x16 (5/8)		3	48,0	105,8
8 1/2"	216.00	0201070000026	Concave Dome Double Gauge Retractable	12x19 (3/4)	6x19 (3/4)	12x19 (3/4)		3	48,0	105,8
8 3/4"	222.00	0201070000010	Concave Heavy Retractable	12x19 (3/4)	6x19 (3/4)	11x16 (5/8)		3	55,8	123,0
8 3/4"	222.00	0201070000014	Concave Ballistic Welding	12x16 (5/8)		10x16 (5/8)	8x16 (5/8)	2	51,6	113,8
FOOT VALVE		0201070010001								

(\*) : D = Diamond buttons.

(\*\*) : B/S = Ballistic Spherical (Spherical buttons on Outer Gauge and ballistic button on the other positions)

# DHD-380 shank (P8.1) hammer



**Features:** \_Length shank = 349.5mm / \_10 Splines / \_Height Foot Valve above strike face = 53.0mm

Diameter		Code	Description	No. x Button diameter, mm (inch)				Flushing holes	Weight Approx.	
Inch	mm			Outer gauge 35°	Inner Gauge 20°	Front 0°	Concavity 18°		kg	Lbs
8"	203.00	0204080000023	Flat Face	12x16 (5/8)		16x16 (5/8)		2	50,0	110,2
10"	254.00	0204080000024	Flat Face	12x19 (3/4)	6x19 (3/4)	13x19 (3/4)		3	66,0	145,5
8"	203.00	0204080000098	Concave Heavy	12x19 (3/4)	6x16 (5/8)	3x16 (5/8)	6x16 (5/8)	3	49,0	108,0
8 1/2"	216.00	0204080000063	Concave Heavy Retractable	12x19 (3/4)	6x19 (3/4)	3x16 (5/8)	8x16 (5/8)	3	52,0	114,6
8 3/4"	222.00	0204080000061	Concave Dome	12x16 (5/8)	6x16 (5/8)	9x16 (5/8)	8x16 (5/8)	3	51,7	114,0
9 1/2"	241.00	0204080000038	Concave Dome	12x16 (5/8)	8x16 (5/8)	6x16 (5/8)	9x16 (5/8)	2	59,5	131,2
10"	254.00	0204080000058	Concave	12x19 (3/4)	6x19 (3/4)	3x16 (5/8)	9x16 (5/8)	3	64,0	141,1
FOOT VALVE		0204080010002								

# PUMA-8.1 shank (PM8.1, PM8.2) hammer



**Features:** \_Length shank = 350mm / \_16 Splines / \_Height Foot Valve above strike face = 55mm

Diameter		Code	Description	No. x Button diameter, mm (inch)				Flushing holes	Weight Approx.	
Inch	mm			Outer gauge 35°	Inner Gauge 20°	Front 0°	Concavity 18°		kg	Lbs
8 3/4"	222.00	0201080000042	Dome Double Gauge Heavy Retractable	12x19 (3/4)	12x19 (3/4)	8x16 (5/8)		3	54,7	120,6
8 3/4"	222.00	0201080000043	Dome Double Gauge Heavy Retractable A1	12x19 (3/4)	12x19 (3/4)	8x16 (5/8)		3	54,7	120,6
9"	228.50	0201080000041	Dome Double Gauge Heavy	12x19 (3/4)	9x19 (3/4)	11x16 (5/8)		3	58,0	128,0
8 1/2"	216.00	0201080000044	Concave Dome B/S* Retractable	12x16 (5/8)	8x16 (5/8)	12x16 (5/8)		2	53,8	118,6
8 1/2"	216.00	0201080000046	Concave Dome 3 Holes B/S* Retractable	12x16 (5/8)	6x16 (5/8)	15x16 (5/8)		3	53,6	118,2
8 3/4"	222.00	0201080000034	Concave Dome Retractable	12x16 (5/8)	6x16 (5/8)	17x16 (5/8)		3	60,0	132,3
8 3/4"	222.00	0201080000035	Concave Heavy Retractable	12x19 (3/4)	6x19 (3/4)	11x16 (5/8)		3	58,7	129,4
8 3/4"	222.00	0201080000038	Concave Heavy Retractable HA**	12x19 (3/4)	6x19 (3/4)	11x16 (5/8)		3	58,7	129,4
8 3/4"	222.00	0201080000039	Concave Heavy "M"*** Retractable	12x19 (3/4)	6x19 (3/4)	11x16 (5/8)		3	58,7	129,4
8 3/4"	222.00	0201080000048	Concave Double Gauge Heavy Retractable Wear pad	12x19 (3/4)	6x19 (3/4)	6x19 (3/4)	7x16 (5/8)	3	55,2	121,7
9"	228.50	0201080000047	Concave Double Gauge Heavy	12x19 (3/4)	6x19 (3/4)	6x19 (3/4)	7x16 (5/8)	3	55,5	122,4
FOOT VALVE		0201080010000								

(\*) : B/S = Ballistic Spherical (Spherical buttons on Outer Gauge and ballistic button on the other positions)

(\*\*) : HA = High Abrasive.

(\*\*\*) : "M" = Mine.

# QL-8 shank (PM8.1, PM8.2) hammer



Features: \_Length shank = 332mm / \_16 Splines / \_Height Foot Valve above strike face = 53.5mm


Diameter		Code	Description	No. x Button diameter, mm (inch)				Flushing holes	Weight Approx.	
Inch	mm			Outer gauge 35°	Inner Gauge 20°	Front 0°	Concavity 18°		kg	Lbs
8 1/2"	216.00	0204080000100	Dome Heavy Retractable	12x19 (3/4)	6x19 (3/4)	11x16 (5/8)		3	52,0	114,6
8 1/2"	216.00	0204080000119	Dome Double Gauge Heavy	12x19 (3/4)	12x19 (3/4)	6x19 (3/4)		3	52,0	114,6
8 3/4"	222.00	0204080000113	Dome Double Gauge Heavy	12x19 (3/4)	12x19 (3/4)	8x16 (5/8)		3	53,2	117,3
8 3/4"	222.00	0204080000099	Dome Heavy	12x19 (3/4)	6x19 (3/4)	11x16 (5/8)		3	60,5	133,4
9 1/2"	241.00	0204080000107	Dome Double Gauge Heavy Retractable A1	12x19 (3/4)	15x19 (3/4)	9x16 (5/8)		3	58,1	128,0
9 1/2"	241.00	0204080000104	Dome Double Gauge Heavy Retractable	12x19 (3/4)	9x19 (3/4)	11x16 (5/8)		3	62,8	138,5
9 1/2"	241.00	0204080000121	Dome Double Gauge Heavy A2 Welding Retractable	12x19 (3/4)	15x19 (3/4)	9x16 (5/8)		3	62,0	136,7
9 1/2"	241.00	0204080000062	Flat Face Heavy Retractable	12x19 (3/4)	6x19 (3/4)	12x19 (3/4)		3	62,5	137,8
10"	254.00	0204080000056	Flat Face Retractable	12x19 (3/4)	6x19 (3/4)	13x16 (5/8)		3	65,7	144,8
8 1/2"	216.00	0204080000106	Concave Dome Multiwings	12x19 (3/4)	8x19 (3/4)	6x19 (3/4)	5x19 (3/4)	2	52,0	114,6
8 3/4"	222.00	0204080000114	Concave Double Gauge Heavy	12x19 (3/4)	6x19 (3/4)	3x19 (3/4)	8x19 (3/4)	3	51,7	114,0
9"	228.50	0204080000070	Concave Heavy Retractable	12x19 (3/4)	6x19 (3/4)	3x16 (5/8)	8x16 (5/8)	3	61,4	135,4
FOOT VALVE		0204080010004								

# SD-8 shank (P7.1, P8.1) hammer



Features: \_Length shank = 321mm / \_8 Splines / \_Height Foot Valve above strike face = 57.0mm

Diameter		Code	Description	No. x Button diameter, mm (inch)				Flushing holes	Weight Approx.	
Inch	mm			Outer gauge 35°	Inner Gauge 20°	Front 0°	Concavity 18°		kg	Lbs
8"	203.00	0204080000117	Dome Double Gauge Heavy Retractable Wear Pad	12x19 (3/4)	9x19 (3/4)	7x16 (5/8)		3	42,7	94,1
8"	203.00	0204080000073	Dome Double Gauge Heavy Retractable	12x19 (3/4)	9x19 (3/4)	7x16 (5/8)		3	42,7	94,1
8"	203.00	0204080000022	Flat Face	12x16 (5/8)		16x16 (5/8)		2	43,0	94,8
8 1/2"	216.00	0204080000035	Flat Face	12x16 (5/8)		18x16 (5/8)		2	48,0	105,8
9 1/2"	241.00	0204080000039	Flat Face	12x16 (5/8)		23x16 (5/8)		3	56,0	123,5
10"	254.00	0204080000018	Flat Face Retractable	12x19 (3/4)	6x19 (3/4)	13x19 (3/4)		3	57,1	125,8
8"	203.00	0204080000053	Concave Retractable	12x16 (5/8)	6x16 (5/8)	3x16 (5/8)	6x16 (5/8)	3	42,0	92,6
8 1/2"	216.00	0204080000065	Concave Heavy Retractable	12x19 (3/4)	6x19 (3/4)	3x16 (5/8)	8x16 (5/8)	3	45,5	100,3
9"	228.50	0204080000020	Concave Heavy Retractable	12x19 (3/4)	6x19 (3/4)	3x16 (5/8)	8x16 (5/8)	3	53,0	116,8
10"	254.00	0204080000025	Concave	12x19 (3/4)	6x19 (3/4)	3x19 (3/4)	9x19 (3/4)	3	55,7	122,8
FOOT VALVE		0204080010001								

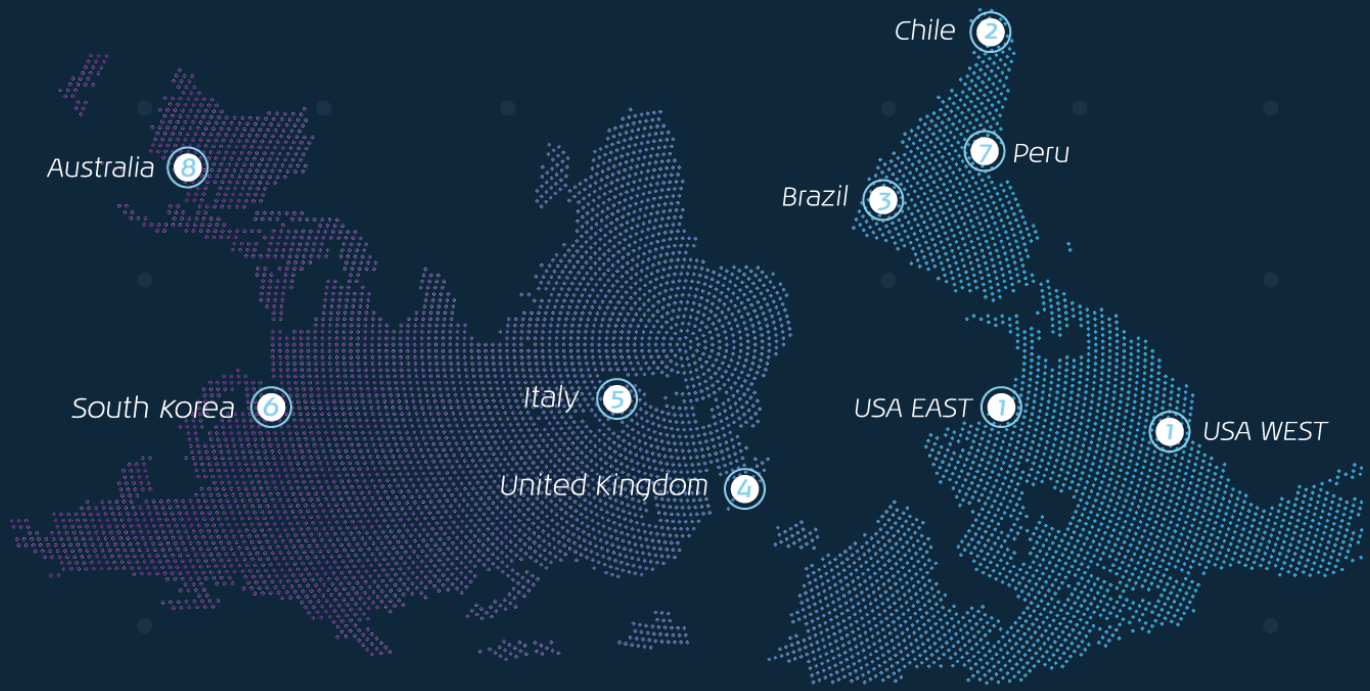

**1 Drillco USA**  
Elko, NV  
Atlanta, GA  
Rockwood, PA  
[infousa@drillco.com](mailto:infousa@drillco.com)

**2 Drillco Chile**  
Santiago  
[infochile@drillco.com](mailto:infochile@drillco.com)

**3 Drillco Brazil**  
Santa Catarina  
[infobrazil@drillco.com](mailto:infobrazil@drillco.com)

**4 Drillco UK**  
Leeds  
[infoeuropa@drillco.com](mailto:infoeuropa@drillco.com)

**5 Drillco Italy**  
Milan  
[info@drillco.it](mailto:info@drillco.it)

**6 Drillco Asia**  
Seoul, South Korea  
[infoasia@drillco.com](mailto:infoasia@drillco.com)

**7 Drillco Peru**  
Lima  
[infoperu@drillco.com](mailto:infoperu@drillco.com)

**8 Drillco Australia**  
Sydney  
[infoaustralia@drillco.com](mailto:infoaustralia@drillco.com)

Discover more at: [www.drillco.com](http://www.drillco.com)

# CONTACT US



[info@drillco.com](mailto:info@drillco.com)

